


3C-A

User Manual

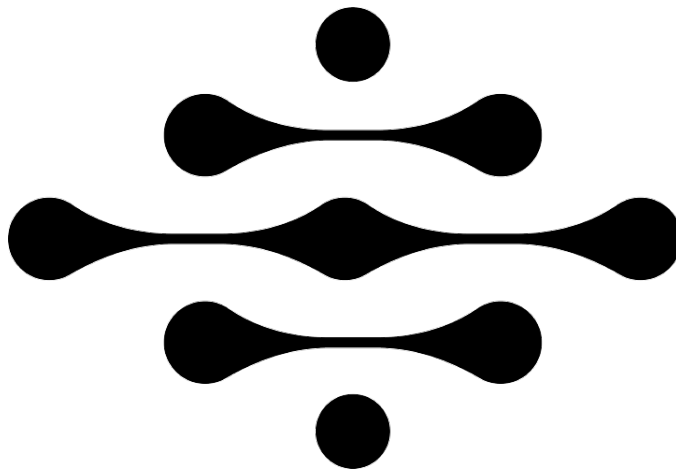

eso-tek.com

Installation

This module is designed to be mounted within any standard Eurorack-compatible case. It requires only 4 HP of width, and because the Mult is a passive module, it requires no power to operate.

Operation

3C-A is a passive three channel attenuator. It allows the user to make precision adjustments to all your modular signals! Patch any Audio / CV Signal into inputs labeled 1, 2 and 3 and use the knob corresponding to the patched inputs!

ESO-TEK

Example

Lets patch (Attenuation)

Patch any signal (Audio/CV) Into the inputs labeled “1, 2 or 3” and another cable for each output (Outputs are not labeled). Adjust the attenuators labeled “1,2 or 3” this will give you control for up to three seperate signals.

ESO-TEK

Example (Continued)

.

Attenuator 1

Attenuator 2

Attenuator 3

Input 1

Input 2

Input 3

Output 1

Output 2

Output 3



Questions Or Concerns?

Please reach out to us if you have any other questions/concerns at:
(support@esotek.com)

If you need support for your module please email as us at:
(techhelp@eso-tek.com)

ESO-TEK

Technical Specifications

Width: 4 HP | Maximum Depth: 27mm |

